


FIXOLITE HIGH INSULATION (HI block)

Reference : B-HI50/14+32


Fixolite block, made in Belgium.
Dimensions are 50 cm wide, 25 cm high (1m² = 8 blocks) and depth varies according to requirements.
The block is made of wood-cement with external insulation in fire-retardant expanded polystyrene (density 40 gr/m³) from 17 to 34 cm.
The block has no thermal bridges.

Total thickness	50.0 cm
Insulation thickness	32.0 cm
Concrete thickness	14.0 cm
Interior side thickness	4.0 cm
Exterior side thickness	4.0 cm
Concrete volume	110.0 l/m ²
Density	± 710 kg/m ³
Weight	96.24 kg/m ²
Thermal insulation λ	0.10 W/m ² K
R coefficient	10.0 m ² K/W
U coefficient	0.1 W/m ² K
Sound absorption α	> 90% (100→5000Hz)
Sound insulation	51 dB
Reaction to fire	Non-flammable (M1)
Fire resistance	> 6h (ISO 834)
Rot-proof	✓
Flexural strength	± 200 DaN

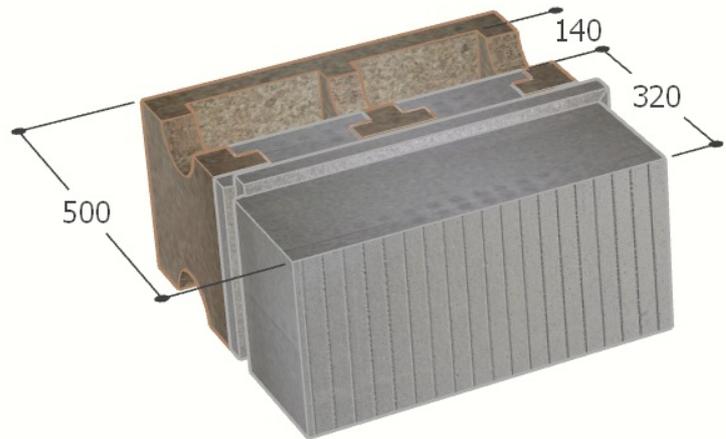

Fixolite high-insulation block range

Fixolite offers 5 sizes of High Insulation blocks with insulation ranging from 17 to 34 cm.
A graphite polystyrene corner block is available for each size.

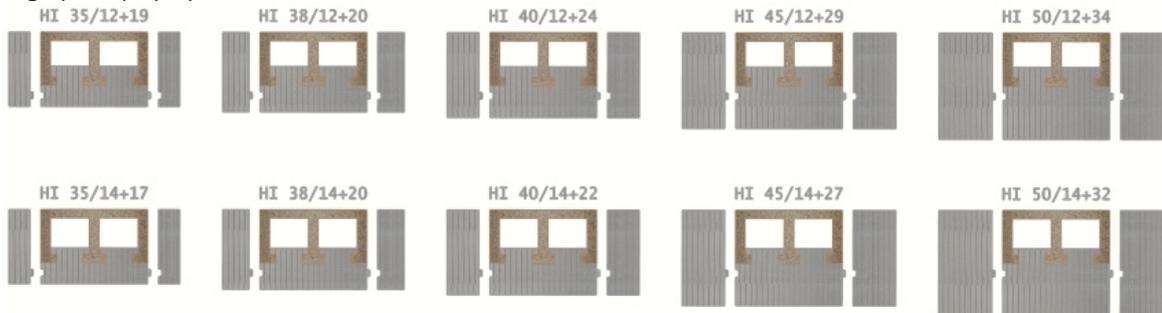


Notes

Corner block reference:

- **B-HI 50.AL** (left)
- **B-HI 50.AR** (right)

On-site cutouts:

- A.** for narrow block
- B.** for external angle
- C.** for internal angle

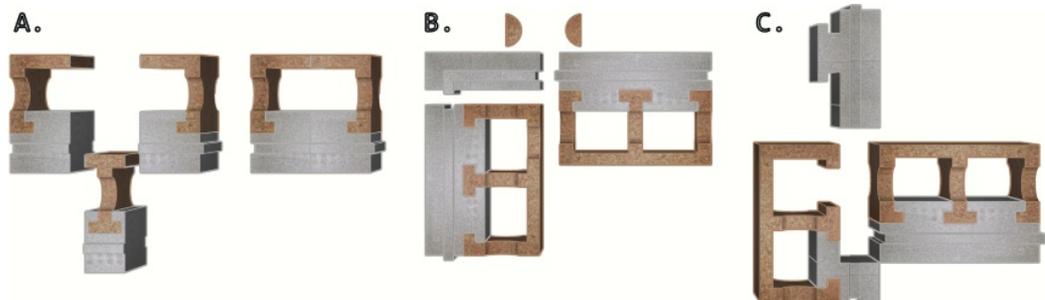

English version :
https://doc.fixolite.eu/en/B-HI50_14_32



Version française :
https://doc.fixolite.eu/fr/B-HI50_14_32