

FIXOLITE HIGH INSULATION (HI block)**Reference : B-HI45/12+29**

Fixolite block, made in Belgium.

Dimensions are 50 cm wide, 25 cm high (1m² = 8 blocks) and depth varies according to requirements.

The block is made of wood-cement with external insulation in fire-retardant expanded polystyrene (density 40 gr/m³) from 17 to 34 cm.

The block has no thermal bridges.

Total thickness 45.0 cm

Insulation thickness 29.0 cm

Concrete thickness 12.0 cm

Interior side thickness 4.0 cm

Exterior side thickness 4.0 cm

Concrete volume 95.0 l/m²

Density ± 710 kg/m³

Weight 95.36 kg/m²

Thermal insulation λ 0.10 W/m²K

R coefficient 9.09 m²K/W

U coefficient 0.11 W/m²K

Sound absorption α > 90% (100→5000Hz)

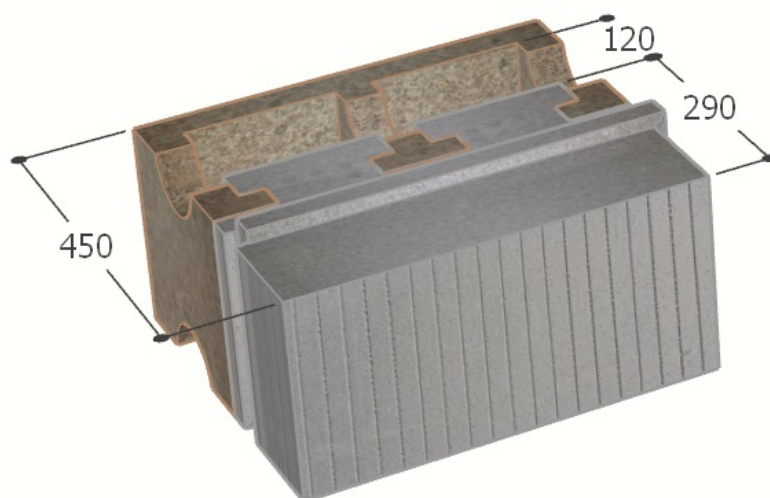
Sound insulation 50 dB

Reaction to fire Non-flammable (M1)

Fire resistance > 6h (ISO 834)

Rot-proof ✓

Flexural strength ± 200 DaN

**Fixolite high-insulation block range**

Fixolite offers 5 sizes of High Insulation blocks with insulation ranging from 17 to 34 cm.

A graphite polystyrene corner block is available for each size.

**Notes**

[label.footer2- contenu-B-HI45]



English version :

https://doc.fixolite.eu/en/B-HI45_12_29



Version française :

https://doc.fixolite.eu/fr/B-HI45_12_29

2026-02 • Fixolite Disclaimer. The information provided in this technical sheet is given for information purposes only and without guarantee of accuracy or completeness. Fixolite declines all responsibility for errors, omissions or consequences linked to the use of this information. Specifications are subject to change without notice.